



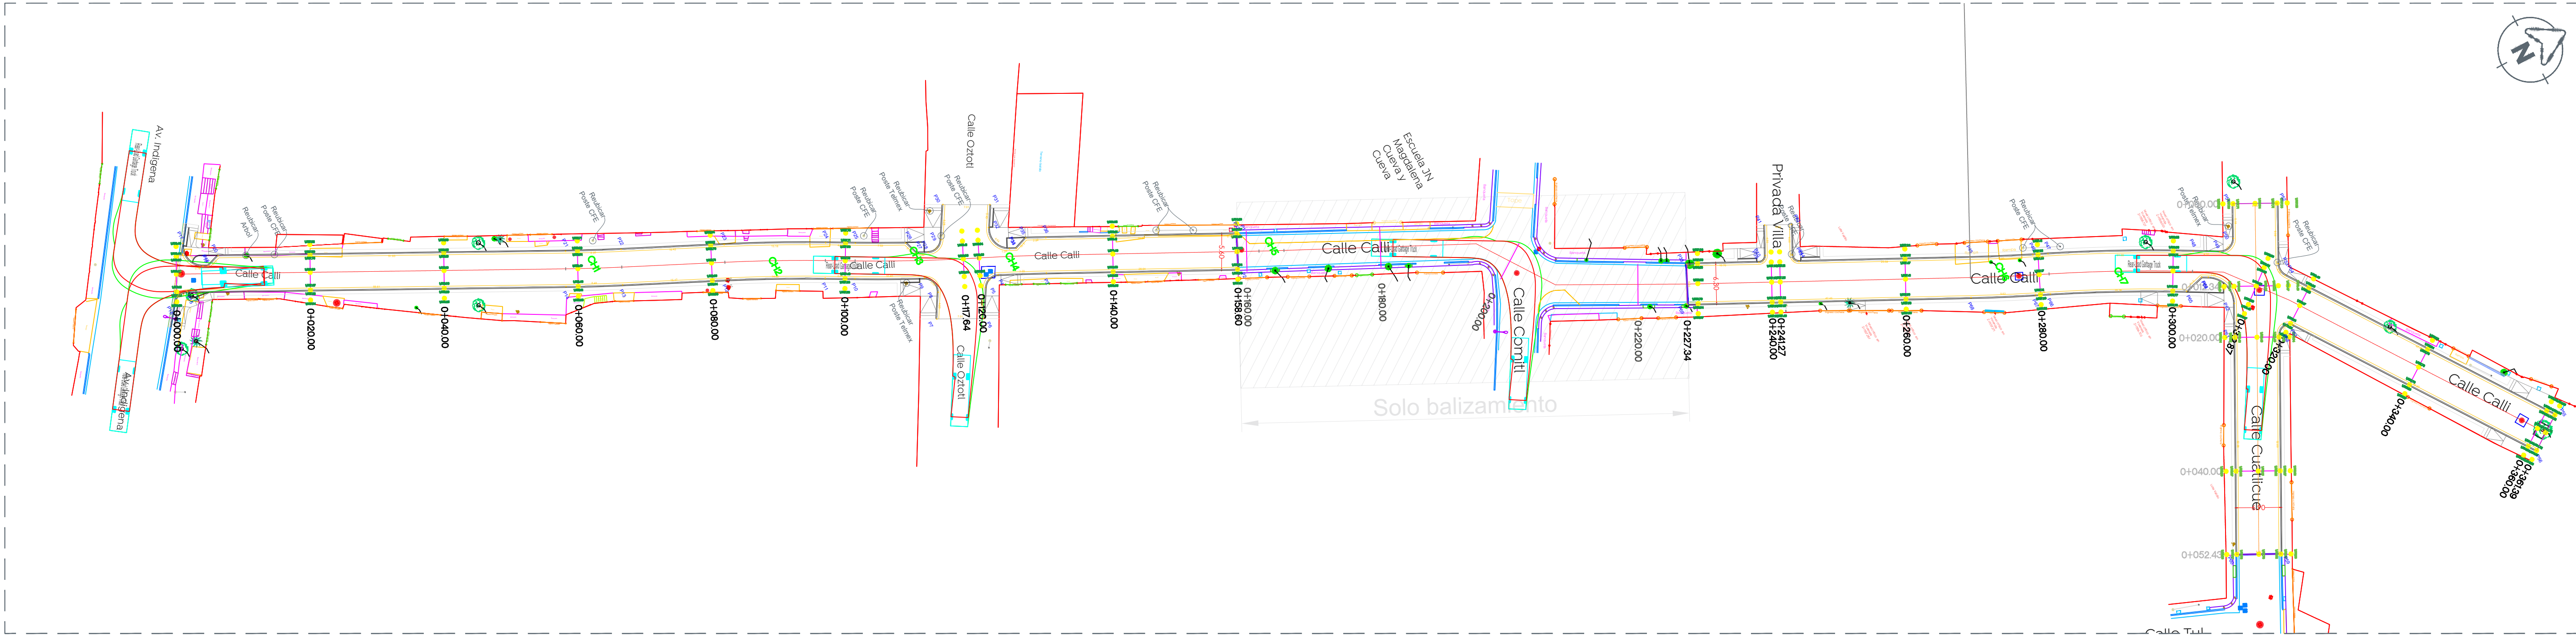

Planta General

1:500

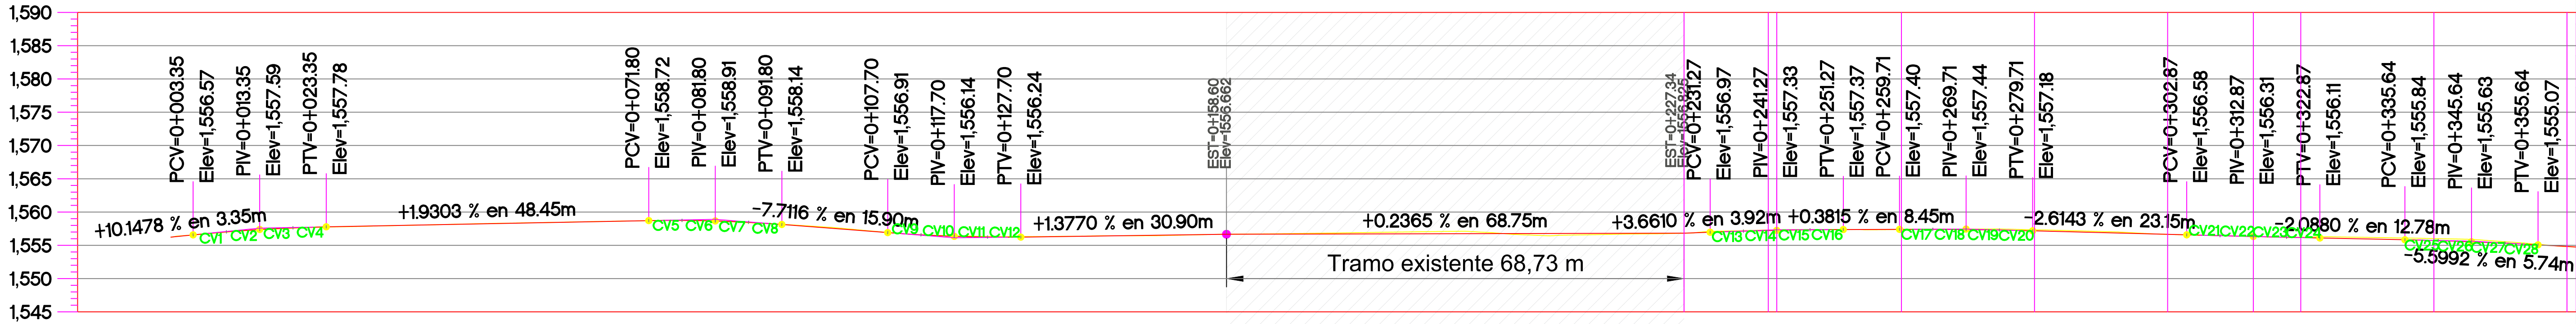

ELEVACION		ESPESOR		VOLUMEN		ORDENADAS DE LA CURVA MASA
TERRENO	RASANTE	CORTE	TERRAPLEN	CORTE	TERRAPLEN	
0+000.00	1,556.23	0.00		0.00	0.00	10.000
0+020.00	1,557.63		0.06	2.35	10.36	9.992
0+040.00	1,558.10	0.00		3.93	13.08	9.983
0+060.00	1,558.50	0.01		6.30	7.79	9.981
0+080.00	1,558.70		0.01	4.03	4.37	9.981
0+100.00	1,557.63	0.12		17.66	3.40	9.995
0+117.64 0+120.00	1,556.42 1,556.29	0.06 0.10		18.45 1.46	6.10 1.38	10.008 10.008
0+140.00	1,556.44	0.03		15.85	5.97	10.018
0+158.60	1,556.66		0.00	7.15	3.13	10.022
0+227.34	1,556.82	0.00		0.00	0.00	10.000
0+240.99	1,557.33	0.08		5.95	2.93	10.003
0+260.00	1,557.37		0.03	7.26	5.02	10.005
0+280.00	1,557.33	0.16		20.39	4.29	10.021
0+300.00	1,556.64		0.01	23.04	2.54	10.042
0+312.87	1,556.31		0.01	4.77	7.60	10.039
0+320.00	1,556.22	0.05		3.87	4.58	10.038
0+340.00	1,556.02	0.29		32.87	3.59	10.068
0+360.00	1,554.95		0.00	28.65	2.16	10.094

Perfil

City of Zapopan

Public Works & Infrastructure

Integral Management of the City

Macrolocalización:

Microlocalización:

General Alcances:

- A) Renovation of water supply and sewerage lines.
- B) Road paving with concrete hydraulic MR and construction of guardrail.
- C) Construction of sidewalks, ramps, curb and gutter with arbolito.
- D) Horizontal and vertical signage.
- E) Public lighting, registers, anchors, poles and luminaires.

Symbolology:

- 0+000.00: Stationing at 20 m
- Eje geométrico: Geometric axis
- 1:632.06: Scale
- 0.00 m: Construction point
- P164: Indicated curve vertical - horizontal
- C1: Indicated curve vertical - horizontal
- : Limit of property
- 1.30 m: Minimum sidewalk
- 0.50 m: Curb and gutter
- 0.45 m: Guardrail
- Notes

Notes:

Project Name: Pavimentación con concreto hidráulico de la calle Calli, incluye: modernización de redes básicas de alcantarillado, conducción y distribución, infraestructura urbana y obras complementarias, colonia Mesa Colorada Poniente, municipio de Zapopan, Jalisco

Content of the plan: Plants and profile, Calle Calli.

No. Contract: DOPI-MUN-R33-PAV-LP-064-2025

Director of Public Works and Infrastructure:

Ing. Ismael Jáuregui Castañeda

Head of the Unit of Studies and Projects:

Arq. Edwin Aguilar Escatel

Head of area: Ing. Norberto Esau Romero Joya

Responsible for the project: Arq. Ángel Fernando Torres Mendoza

Location: C. Calli, Col. Mesa Colorada Poniente, Zapopan, Jalisco

Fecha: mayo 25

Escala: Indicada

Cotas: Metros

Clave: URB.06